

# SW WB<sub>2</sub>型(Type)

## 特点

- ▶ 多弹簧、弹簧设防护套
- ▶ 聚四氟乙烯波纹管
- ▶ 外装式

## Specialty

- ▶ Multiple Spring and Spring with Protective Cover
- ▶ PTFE-Bellows
- ▶ Mounted Exterior

## 适用范围

- ▶ 密封腔压力:  $P=0\sim 0.8\text{MPa}$
- ▶ 密封腔温度:  $t=-10^{\circ}\text{C}\sim 100^{\circ}\text{C}$
- ▶ 转 速:  $n\leq 3000\text{r/min}$
- ▶ 介 质: 酸性及其它强腐蚀性液体, 强氧化剂或稀释剂, 有机化合物等介质。


## Apply Range

- ▶ **Annular Seal Pressure**:  $P=0\sim 0.8\text{MPa}$
- ▶ **Annular Seal Temperature**:  $t=-10^{\circ}\text{C}\sim 100^{\circ}\text{C}$
- ▶ **Rotation speed**:  $n\leq 3000\text{r/min}$
- ▶ **Medium**: Acidity and High-corrosion liquids, High-oxidant or thinner and organic compound.

## 装配尺寸

Fitting Dimension

规格 (Specification)	尺寸 (Size)	$d_1$	$d_3$	$d_6$	$d_7$
WB <sub>2</sub> -25		25	69	47	60
WB <sub>2</sub> -30		30	74	52	66
WB <sub>2</sub> -35		35	79	57	71
WB <sub>2</sub> -40		40	84	62	76
WB <sub>2</sub> -45		45	89	67	82
WB <sub>2</sub> -50		50	96	72	86
WB <sub>2</sub> -55		55	101	77	94
WB <sub>2</sub> -60		60	106	82	102

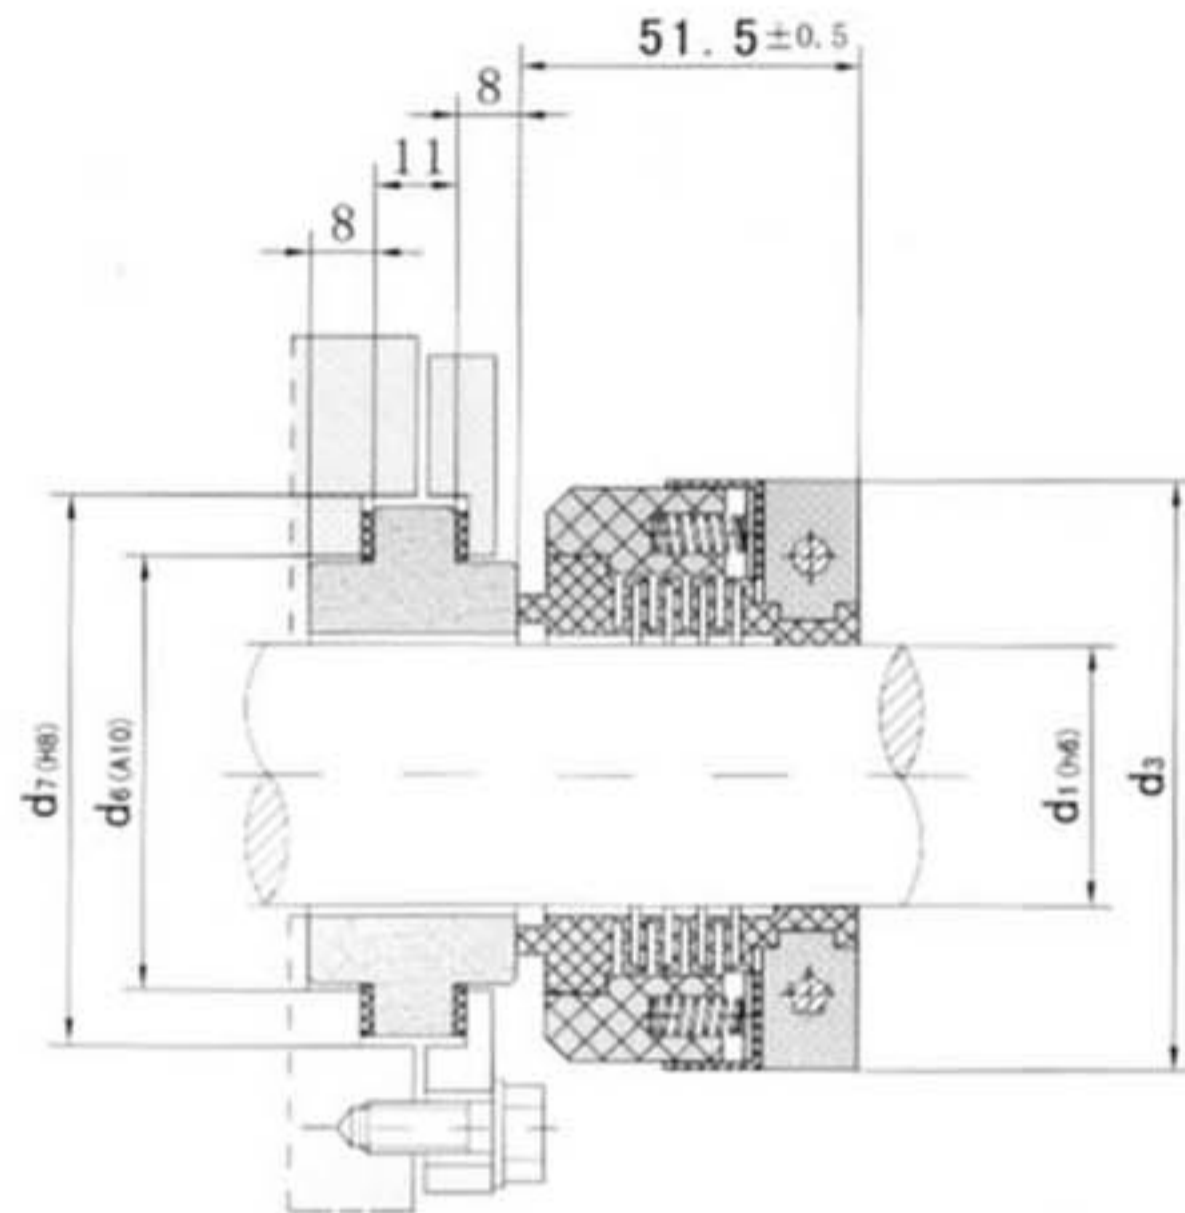

# SW 152型(Type)

## 特点

- ▲ 多弹簧
- ▲ 聚四氟乙烯波纹管
- ▲ 外装式

## Specialty

- ▶ Multiple Spring
- ▶ PTFE-Bellows,
- ▶ Mounted Exterior.

## 适用范围

- ▶ 密封腔压力:  $P=0\sim 0.5\text{MPa}$
- ▶ 密封腔温度:  $t=-10^{\circ}\text{C}\sim 80^{\circ}\text{C}$
- ▶ 转 速:  $n\leq 3000\text{r/min}$
- ▶ 介 质: 强腐蚀性介质(除氢氟酸外无悬浮颗粒)。

## Apply Range

- ▶ **Annular Seal Pressure:**  $P=0\sim 0.5\text{MPa}$
- ▶ **Annular Seal Temperature:**  $t=-10^{\circ}\text{C}\sim 80^{\circ}\text{C}$
- ▶ **Rotation speed:**  $n\leq 3000\text{r/min}$
- ▶ **Medium:** High-corrosion mediums and un-floating granule except hydrofluoric acid.

## 装配尺寸

Fitting Dimension

规格 (Specification)	尺寸 (Size)	$d_1$	$d_3$	$d_7$	$L_1$
152-30		30	70	53	59.5
152-35		35	75	58	59.5
152-40		40	80	63	59.5
152-45		45	86	68	62.5
152-50		50	91	73	62.5
152-55		55	96	78	62.5
152-60		60	101	83	62.5
152-65		65	106	88	62.5

